



# EAX-500

The Detex EAX-500 is designed for applications that require an alarmed exit device on secured doors. The alarm, with approximately 100dB, will sound when someone attempts an unauthorized exit. The EAX-500, with its redesigned shape and smaller size make it the choice for quick and easy installations on emergency exit and restricted doors.

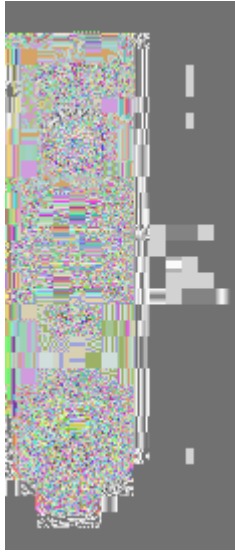

- Mortise cylinder required with standard Yale cam for Inside Key Control
- Rim cylinder required for Outside Key Control

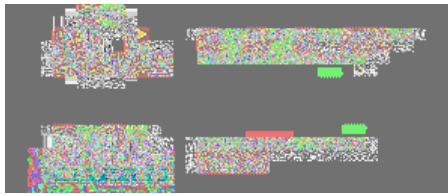

## Technical Specifications :

- Approximate 100dB piezo alarm
- Mortise cylinder key switch arming
- 9 VDC battery powered • Low Battery Alert
- Manual arming, disarming & rearming
- LED visual arming indicators
- Audible arming indicators
- Outside Key Control compatible
- Fits 2" narrow stile doors
- Alarm accepts 5, 6 and 7 pin standard and interchangeable core mortise cylinders with a standard Yale cam
- Field selectable 2-minute auto rearm
- Field selectable status indicators
- Field deactivation of extended bypass (door must be closed to arm device)

## Features and Benefits:

- Low-cost, self-contained door alarm with piezo horn that sounds to warn of unauthorized use of a door
- Surface door mount only. Easy to install with ordinary tools.
- Patented plastic template allows for foolproof alignment of internal magnetic door contact and an accurate installation.
- Now available with field selectable options.
- Tapered cover allows for installation on narrow stile doors, 2" minimum.
- An intelligent circuit that automatically senses the "hand-ing" of the alarm location on the door.
- Patented cam assembly automatically adjusts for different sizes of cylinders without the use of spacers
- Mortise cylinder required with standard Yale cam for IKC
- Alarm can only be silenced by proper control key
- Modern graphics on cover to demonstrate key rotation and operation
- Improved electronic circuits for longer battery life, LED functions
- Tamper resistant housing with cover lock, protects electronics and battery from manipulation.
- Extended bypass allows alarm to remain bypassed when door is open and automatically rearm upon door closing.
- Custom settings may be ordered & programmed at factory.
- Extended bypass now a standard feature - user may deactivate if necessary
- Rim cylinder required

